




3in1 TravelCharger USB-C/A 65W

Quick guide


441-59

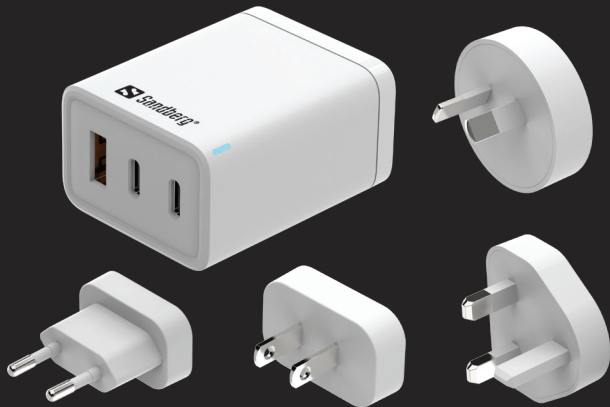


www.sandberg.world

Assemble


1



2




3






Dismantle

1



2



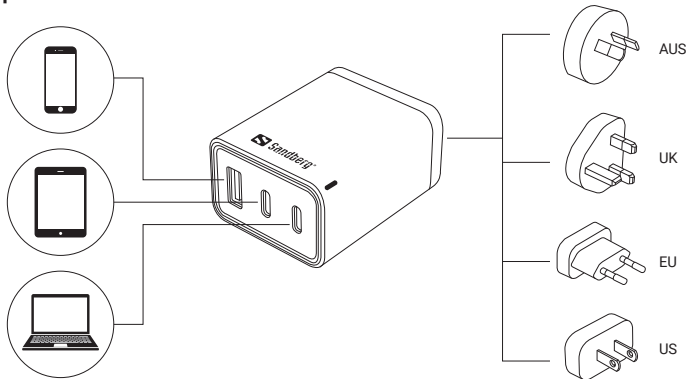Example of use


Input: AC 100-240V 50/60Hz, 1.5A Max

Output Power: DC 65W (Total max)

Output USB-C1 PD solo: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output USB-C2 PD solo: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output USB-A solo: 4.5V/5A, 5V/3A, 5V/4.5A, 9V/3A, 12V/3A, 20V/3A (60W Max)

Output USB-C1+C2: 45W + 20W

Output USB-C1 + USB-A: 45W + 18W

Output USB-C2 + USB-A: (5V/3A)15W balanced load

Output USB-C1 + (USB-C2 + USB-A): 45W + (15W balanced load C2+A)

Balanced load for 3 ports, total 65W Max

*** USB-C2 is not as powerful as it shares energy with the USB-A port.
If they run simultaneously, they have 5V/3A to share.**



Support

<http://helpdesk.sandberg.world>

Warranty

There is a five-year warranty on your Sandberg product.
Please read the warranty terms and register your new Sandberg product at www.sandberg.world/warranty

5
Years
Warranty

3in1 TravelCharger USB-C/A 65W

Item no. 441-59 (S-TR-168D)

Input: AC 100-240V 50/60Hz, 1.5A Max Output Power: DC 65W (Total max)

Output USB-C1 PD solo: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output USB-C2 PD solo: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W Max)

Output USB-A solo: 4.5V/5A, 5V/3A, 5V/4.5A, 9V/3A, 12V/3A, 20V/3A (60W Max)

Output USB-C1+C2: 45W + 20W

Output USB-C1 + USB-A: 45W + 18W

Output USB-C2 + USB-A: (5V/3A) 15W balanced load

Output USB-C1 + (USB-C2 + USB-A):

45W + (15W balanced load C2+A)

Balanced load for 3 ports, total 65W Max

Sandberg A/S, Bregnerødvej 133D,

3460 Birkerød, Denmark

www.sandberg.world

Made in China PO 31318



CONFORMS TO
UL STD. 2091-1
US CERTIFIED TO
CSA STD. C22.2
No. 62-959-1



For information on handling electronic waste, see www.sandberg.world/weee