




Solar Charger 40W LightWeight


Quick guide

421-20

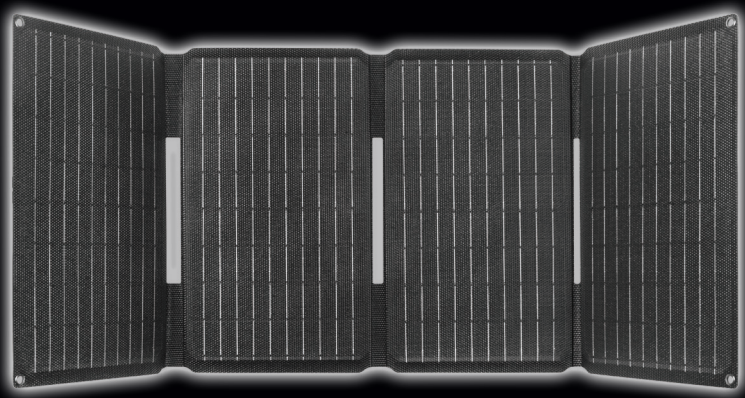


www.sandberg.world

Angling

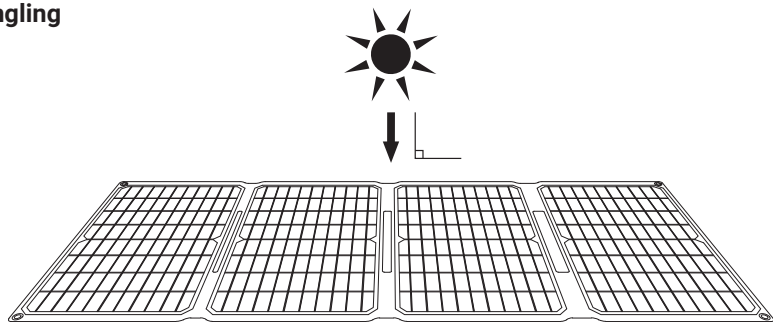


Position the solar panel in the most direct angle towards the sun as possible.

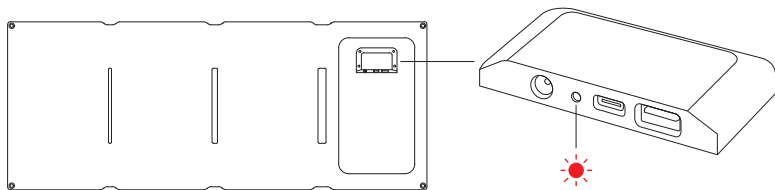


The solar panel is receiving power and is ready to output power.

Charge devices

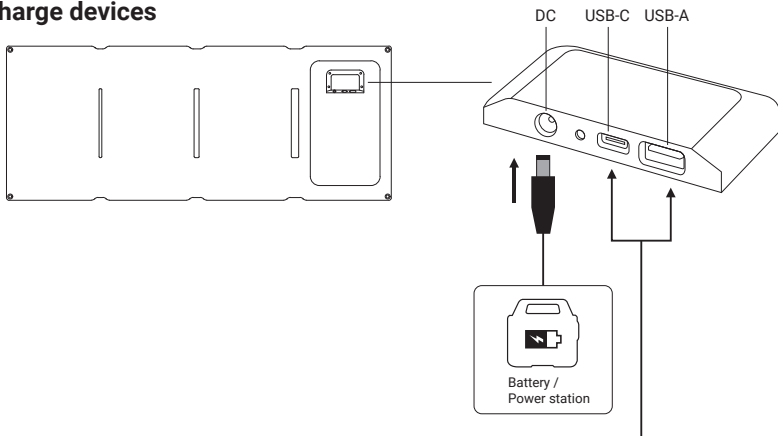

Option A

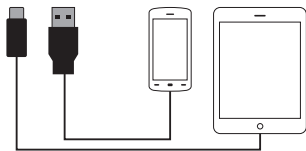

Charge up to 2 devices from direct sunlight.

Option B



Charge powerbank and stabilize your charging in weaker sunlight. **NB:** Requires powerbank to support simultaneous power in/out.

Examples of use



Support

<http://helpdesk.sandberg.world>

Warranty

There is a five-year warranty on your Sandberg product. Please read the warranty terms and register your new Sandberg product at www.sandberg.world/warranty

5
Years
Warranty



Item no. 421-20

Solar Charger 40W LightWeight

Solar panel: 40W (Monocrystalline)

USB-A: 5V/3.4A, 9V/2.5A, 12V/2A (24W Max)

USB-C: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A (PD30W Max)

DC: 18V/2.23A (40W Max)

Product weight: 900g

www.sandberg.world

info@sandberg.world

Sandberg A/S
Bregnerødvej 133D,
3460 Birkeroed,
Denmark



Made in China



For information on handling electronic waste, see www.sandberg.world/weee