







Car Jumpstarter TirePump 10000

Quick guide
421-21



www.sandberg.world



Product overview

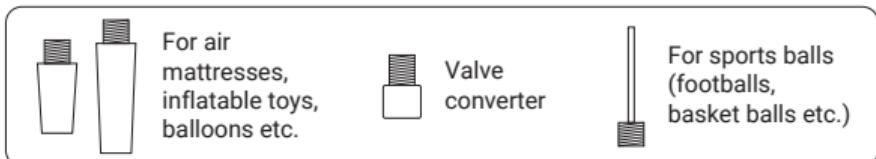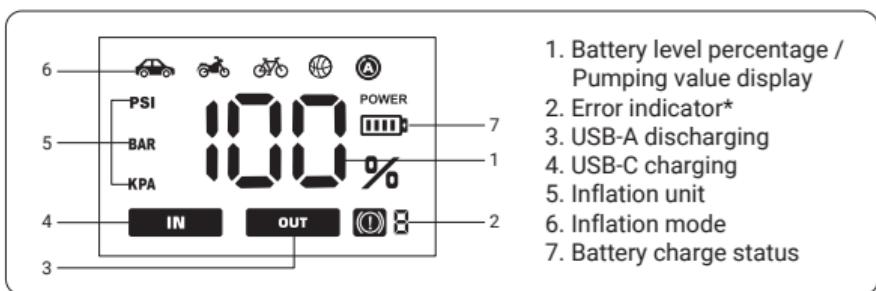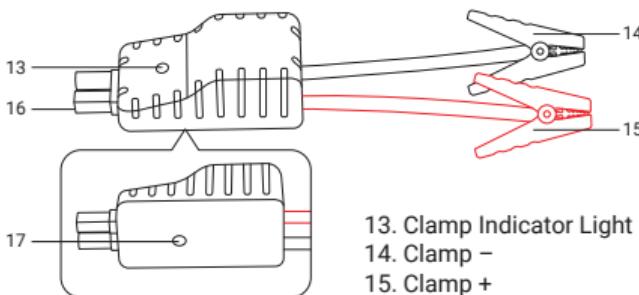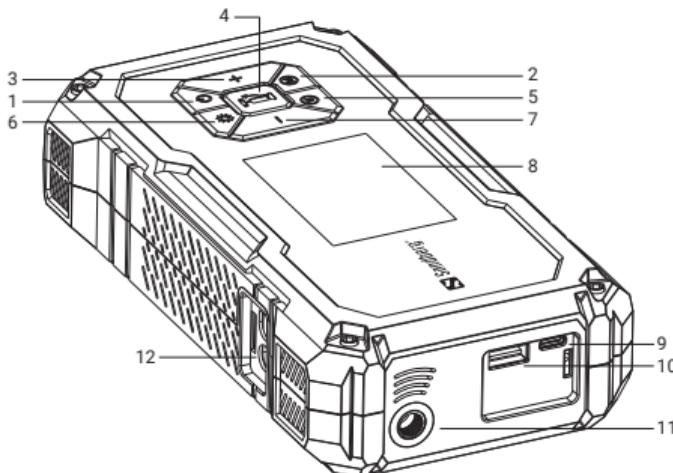


Error indicator*

Error message on screen	Cause	Error solution
① 1	USB discharge over current	Turn off the output and wait for the fault to be cleared - Reinsert to restore
① 2	USB discharge short circuit	Turn off the output and wait for the fault to be cleared - Reinsert to restore
① 3	Sensor not detected	The air pump is running and the air pressure value is always displayed as 0
① 4	High temperature protection for inflating	Take a 10 minute break before re-inflating
① 5	Charge and discharge high temperature protection	Alarm disappears when temperature is decreased (charging temperature: 0 - 50°C, discharging temperature: -20 - 60°C)


Charge Powerbank

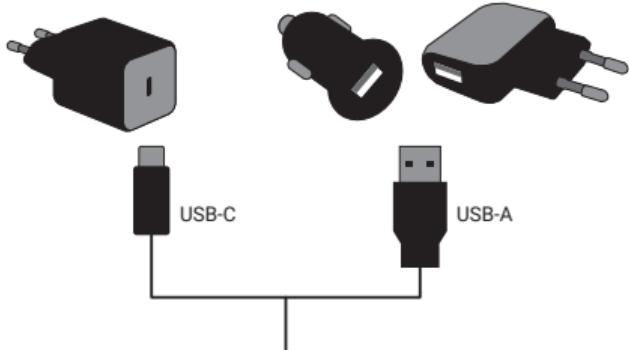


Charge devices




Check battery status




Jumpstart Instructions

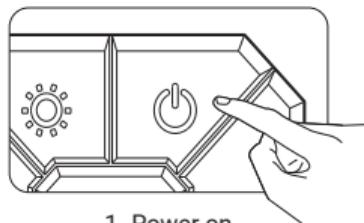


1. Power on




2. Plug in jump cable




3. RED to (+), BLACK to (-)



4. Start engine

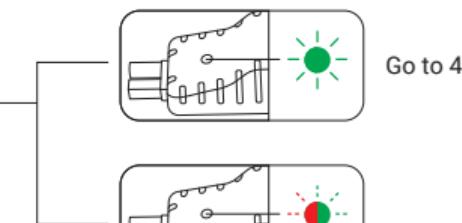


Go to 4




Press

3 seconds

Go to 4




5. Remove cable





6. Done

• Max: Petrol 4.0T / Diesel 3.0T • Wait 1 minute between attempts • Stop after 3 failed attempts


Clamp Indicator Guide





Ready
- You can start the engine





Too hot / timeout
- Wait 1 minute and try again




Start timeout reached
- Wait before retry









Wrong connection
- RED and BLACK clamps are reversed






High voltage
- Stop immediately and check battery type



Inflate a Tire




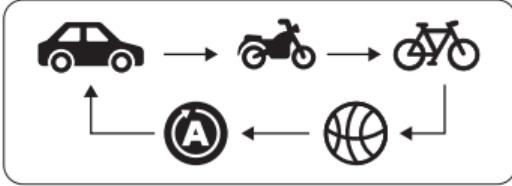
1.  
 Air hose
2. 
3. 
4. 
 

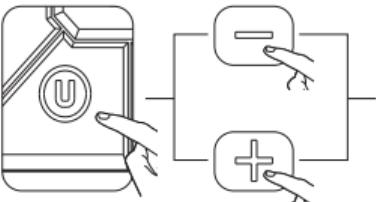Inflation modes	Pressure range
	26-51 PSI, 1.8-3.5 BAR, 180-350 KPA
	26-44 PSI, 1.8-3.0 BAR, 180-300 KPA
	30-65 PSI, 2.0-4.0 BAR, 210-450 KPA
	4-16 PSI, 0.27-1.1 BAR, 25-110 KPA
	0-150 PSI, 0-10.3 BAR, 20-999 KPA
5. 
6. 

Press
L
3 seconds
to start
7. 

Short
press
to off

Flashlight procedure



Support

helpdesk.sandberg.world

Warranty

There is a five-year warranty on your Sandberg product.
Please read the warranty terms and register your new
Sandberg product at www.sandberg.world/warranty

5

Years
Warranty

Car Jumpstarter TirePump 10000

Item no. 421-21

Capacity: 10000 mAh / 37 Wh

Battery type: Lithium-ion

USB-C input: 5V/2A, 9V/2A, 12V/1.5A

USB-A output: 5V/2.4A

Clamp rated output: 12V DC 400A

Clamp peak output: 12V DC 800A

Air compressor pressure: Up to 150 PSI

LED light power: 2W

Product weight: 784g

www.sandberg.world info@sandberg.world

Sandberg A/S

Bregnerødvej 133D, 3460 Birkeroed, Denmark



Made in China

NOTE: If not used regularly, please
recharge the powerbank at least every 3
months to maintain optimal
performance.

